

*only nature moves fluid more efficiently.*

## SCC DC-206-10 FLEXIBLE IMPELLER PUMP


*Excellent pump for management of water-based applications as well as oils and other viscous fluids.*

In our experience, all brass and stainless steel general utility pumps provide long life and top service. Excellent pump for bilge live bait tanks, liquid transfer, de-watering, emptying water beds, clogged sinks, tubs, and other small jobs around the house. All metal construction makes this pump very durable and not subject to damage through heat build-up.

Buna N. flexible impeller and lip seal help provide up to 400 GPH flow. The bronze pump head has 3/4" OD garden hose threads and 3/8" NPT threads. Available in both 115v AC and 12v or 24v DC brush type motors for easy power source.


Pumps will self-prime to 10 ft. and will handle most domestic and commercial utility pumping requirements, as long as the liquid is compatible with the pump materials of construction.\* Flexible Impeller Pump usage should be intermittent and within the temperature range of 40° F and 160° F.

\* Not for use with flammable liquids or liquids not compatible with materials of construction.

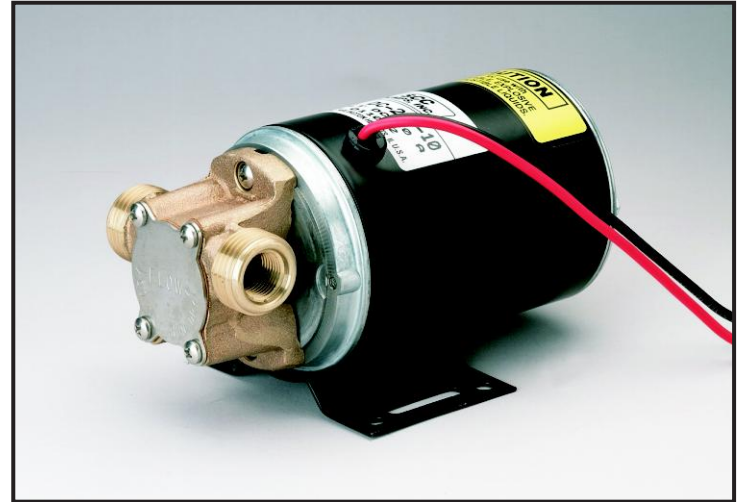

### DC-206 Dimensions

3/4" GARDEN HOSE  
THREADS EXTERNAL  
3/8" NPT INTERNAL

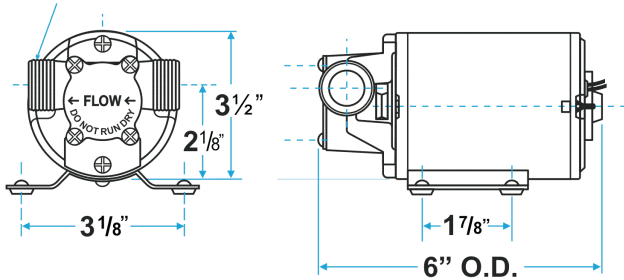


1'	5'	10'	15'	20'	30'	40'	Shut-Off
385	375	342	312	273	192	85	42 FT.

Description		DC-206
Power supply required		12V DC
Motor, full load Amps (fuse size)		10.0 Amps
Motor type (design)	Motor leads and length	Permanent magnet 14 Ga., 10" to 11" Long 2 Leads (red =+, black =-)
	Motor leads and length	
Dimensions (overall, not incl. base)		6" O.D. L x 3-1/2" H x 3-3/8" W
Maximum liquid temperature		140°F
Minimum liquid temperature		40°F
Pump body material		Bronze
Impeller and lip seal		Nitrile™
Lip seal metal retainer		BL 22
Motor shaft material		416 S.S.
Ports		Dual threaded with 3/4" external hose thread and 3/8" NPT internal suction & discharge
Pump gasket		Paper
Cover		316 S.S.
Screws		18-8 S.S.
Slinger		Neoprene
Shipping weight		5 lbs.

Note: Specifications subject to change without notice.

### AC-106 / DC-206 Performance Chart

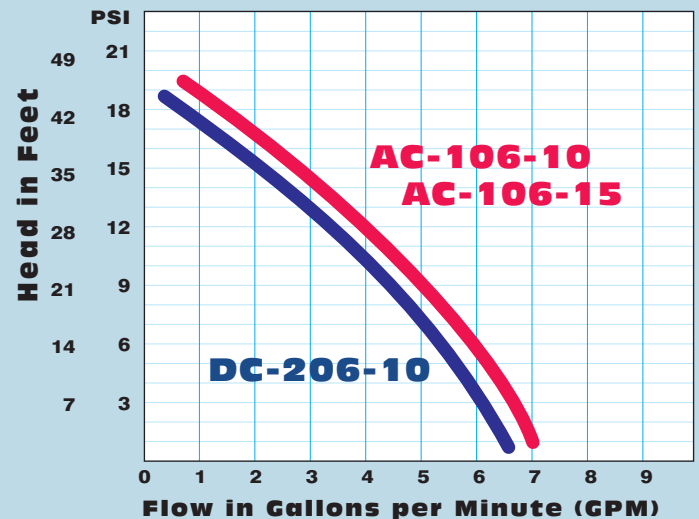

**SCC  
PUMPS, INC.**

THE  
SMALL PUMP  
SPECIALISTS

**General Offices:**

708 W. Algonquin Road; Arlington Heights, IL 60005  
info@sccpumps.com • www.sccpumps.com

**Manufacturing:** 847-593-8495, or 800-334-1199 • F. 847-593-8204

**Distribution:** Midwest: 847-593-8201 • F. 847-593-8204